

Research Paper

NUMERICAL STUDY OF ANTI-SYNCHRONIZATION OF A NATURAL SATELLITE (ENCELADUS)

Mohammad Shahzad¹ and Mohammad Raziuddin^{2*}*Corresponding Author: **Mohammad Raziuddin**, ✉ dmsinfinite@gmail.com

we study the anti-synchronization (AS) behaviour of a chaotic rotational dynamics of enceladus (natural satellite of Saturn) with another identical dynamical system evolving from different initial conditions using the active control technique. The designed controllers, with our own choice of the coefficient matrix of the error dynamics, are found to be effective in the stabilization of the error states at the origin. Numerical simulations are presented to illustrate the effectiveness of the proposed active control technique using mathematica.

Keywords: Chaos, Anti-synchronization (AS), Enceladus

INTRODUCTION

During the so far progress in the synchronization chaotic systems, linear Active and the Non-linear Control methods are the one that are widely implemented to synchronize the identical as well as non-identical chaotic systems from various fields of nonlinear sciences (G Cai and Z Tan, 2007; H Zhang and X K Ma, 2004; A B Saaban *et al.*, 2013; 2014; I Ahmad *et al.*, 2014a; 2014b; 2014c).

A phenomenon similar to synchronization in which the state vectors of the synchronized systems have the same amplitude but opposite signs as those of the master system known as AS. In this phenomenon the sum of two signals is expected to converge to zero when AS appears. Recently, active control has been extensively implemented to study the AS behavior of two identical as well as non-identical chaotic systems (Y Zhang and J Sun, 2004; J B Liu *et al.*, 2000; M Shahzad, 2011a; M C Ho *et al.*, 2002;

M Shahzad, 2011b; U E Vincent and A Ucar, 2007; U E Vincent and J A Laoye, 2007; C M Kim, 2003; A A Emadzadeh and M Haeri, 2005; C Li and X Liao, 2006). In fact, in engineering, it is hardly the case that every component can be assumed to be identical. Thus, it is much more attractive and challengeable to realize AS of two different chaotic systems. Motivated by the afore mentioned studies, we aim to implement the active control method to study the AS behavior of the rotational dynamics of enceladus with another identical dynamical system evolving from different initial conditions.

In our present paper, we continue our study to use the active control technique based on the Lyapunov stability theory and the Routh-Hurwitz criteria to study the AS behavior of the rotational dynamics of enceladus (M Shahzad, 2011b) that is out of round satellite in a fixed elliptical orbit with spin axis perpendicular to the orbit plane with another identical dynamical system evolving from different initial conditions.

¹ Department of General Studies, College of Applied Sciences, Nizwa (Oman).

² Department of Information Technology, College of Technology, Nizwa (Oman).

ANTI-SYNCHRONIZATION VIA ACTIVE CONTROL

For a system of two coupled chaotic oscillators, the master system ($\dot{x}_i = f(x_i, y_i)$ for $i= 1,2,3$) and the slave system ($\dot{y}_i = g(x_i, y_i)$ for $i= 1,2,3$), where $x_i(t)$ and $y_i(t)$ are the phase space (state variables), $f(x_i, y_i)$ and $g(x_i, y_i)$ and are the corresponding nonlinear functions, AS in a direct sense implies $\lim_{t \rightarrow \infty} |x_i(t) + y_i(t)| \rightarrow 0$ for $i=1,2,3$. When this occurs the coupled systems are said to achieve AS completely. This phenomenon has been investigated both experimentally and theoretically in many physical systems (G Cai and S Zheng, 2008; M Shahzad, 2012a; A Khan and M Shahzad, 2012; M Shahzad, 2012b; M Shahzad and I Ahmed, 2013; M Shahzad and M Raziuddin, 2013a; 2013b; 2013c; M Shahzad and M Haris, 2014).

In order to formulate the active controllers for AS, we need to redefine the error functions as $e_i(t) = y_i(t) + x_i(t)$ for $i=1,2,3$, where $e_i(t)$ for $i=1,2,3$ are called the AS errors such that $\lim_{t \rightarrow \infty} e_i(t) \rightarrow 0$ for $i=1,2,3$.

We recall the master (driver) and slave (response) system from our previous study (M Shahzad, 2012b) to extend our study for AS behavior of the rotational dynamics of Enceladus using active control.

Master system:

$$\dot{x}_1 = x_2,$$

$$\dot{x}_2 = \frac{\varepsilon^2 n^2 e}{4} \sin(x_1 + x_3) - \frac{7\varepsilon^2 n^2 e}{4} \sin(3x_3 - x_1) - \frac{\varepsilon^2 n^2}{2} \sin 2x_3,$$

$$\dot{x}_3 = x_2 - n.$$

(1.1)

Slave system:

$$\dot{y}_1 = y_2 + u_1(t),$$

$$\dot{y}_2 = \frac{\varepsilon^2 n^2 e}{4} \sin(y_1 + y_3) - \frac{7\varepsilon^2 n^2 e}{4} \sin(3y_3 - y_1) - \frac{\varepsilon^2 n^2}{2} \sin 2y_3 + u_2(t),$$

$$\dot{y}_3 = y_2 - n + u_3(t).$$

Where $\varepsilon = \sqrt{3(B-A)/C}$ the moments of inertia are $A < B < C$, n is the orbital frequency, e is the eccentricity of the satellite, $x_i(t)$ & $y_i(t)$ are the state variables of master & slave systems respectively and $u_i(t)$ for $i= 1,2,3$, are control functions to be determined. Let $e_i(t) = y_i(t) + x_i(t)$ for $i= 1,2,3$ be the AS errors such that in AS state $\lim_{t \rightarrow \infty} e_i(t) \rightarrow 0$ for $i= 1,2,3$. From (1.1) and (1.2), we obtain the error dynamics.

$$\dot{e}_1 = e_2 + u_1(t),$$

$$\begin{aligned} \dot{e}_2 = & \frac{\varepsilon^2 n^2 e}{4} \{\sin(y_1 + y_3) + \sin(x_1 + x_3)\} - \frac{7\varepsilon^2 n^2 e}{4} \{\sin(3x_3 - x_1) + \sin(3y_3 - y_1)\} \\ & - \frac{\varepsilon^2 n^2}{2} \{\sin 2x_3 + \sin 2y_3\} + u_2(t), \end{aligned}$$

$$\dot{e}_3 = e_2 - 2n + u_3(t).$$

(1.3)

The error system (1.3) to be controlled is a linear system with control inputs. Therefore the control functions can be redefined in order to eliminate the terms in (1.3) which cannot be expressed as linear terms in e_1, e_2 and e_3 as follows:

$$u_1(t) = v_1(t),$$

$$\begin{aligned} u_2(t) = & -\frac{\varepsilon^2 n^2 e}{4} \{\sin(y_1 + y_3) + \sin(x_1 + x_3)\} + \frac{7\varepsilon^2 n^2 e}{4} \{\sin(3x_3 - x_1) + \sin(3y_3 - y_1)\} \\ & + \frac{\varepsilon^2 n^2}{2} \{\sin 2x_3 + \sin 2y_3\} + v_2(t), \end{aligned}$$

$$u_3(t) = v_3(t) + 2n.$$

(1.4)

Therefore the linear error system can be written as follows:

$$\dot{e}_1(t) = e_2(t) + v_1(t),$$

$$\dot{e}_2(t) = v_2(t),$$

$$\dot{e}_3(t) = e_2(t) + v_3(t).$$

(1.5)

The error system (1.5) to be controlled is a linear system with control inputs $v_1(t), v_2(t)$, and $v_3(t)$ as the function of the error states $e_1(t), e_2(t)$ and $e_3(t)$. As stated, as long as $\lim_{t \rightarrow \infty} e_i(t) \rightarrow 0$ for $i=1,2,3$, AS between the master and slave system is

realized, that is, the system represented by (1.1) and (1.2) are achieving AS under active control. According to active control method, the controllers $v_1, v_2,$ and v_3 can be written as:

$$(v_1 \ v_2 \ v_3)^T = A(e_1 \ e_2 \ e_3)^T$$

(1.6)

Where A is a 3x3 constant matrix. As per the Lyapunov stability theory and the Routh-Hurwitz criteria, in order to make the close loop system (1.5) stable, the proper choice of the elements of A is such that the system (1.6) must have all eigen values with the negative real parts:

Let
$$A = \begin{pmatrix} -1 & 1 & 0 \\ 0 & -1 & 0 \\ 0 & 1 & -1 \end{pmatrix},$$
 bring (1.6) into (1.5),

we may obtain

$$(\dot{e}_1 \ \dot{e}_2 \ \dot{e}_3)^T = B(e_1 \ e_2 \ e_3)^T$$

$$\begin{pmatrix} \dot{e}_1 \\ \dot{e}_2 \\ \dot{e}_3 \end{pmatrix} = \begin{pmatrix} -1 & -1 & 0 \\ 0 & -1 & 0 \\ 0 & -1 & -1 \end{pmatrix} \begin{pmatrix} e_1 \\ e_2 \\ e_3 \end{pmatrix} + A \begin{pmatrix} e_1 \\ e_2 \\ e_3 \end{pmatrix}$$

$$\Rightarrow B = \begin{pmatrix} -2 & 0 & 0 \\ 0 & -2 & 0 \\ 0 & 0 & -2 \end{pmatrix}$$

Now the slave system (1.2) can be defined as

$$\dot{y}_1 = 2y_2 - y_1 + x_2 + x_1,$$

$$\dot{y}_2 = \frac{-\varepsilon^2 n^2 e}{4} \sin(x_1 + x_3) + \frac{7\varepsilon^2 n^2 e}{4} \sin(3x_3 - x_1) + \frac{\varepsilon^2 n^2}{2} \sin 2x_3 - x_2 - y_2,$$

$$\dot{y}_3 = 2y_2 - x_3 + x_2 - y_3 + n.$$

(1.7)

NUMERICAL SIMULATION FOR ANTI-SYNCHRONIZATION

For the parameters involved in system under investigation, $e = 0.45, \varepsilon = 0.44,$ and $n = 0.3$ and

the initial conditions for master & slave systems $x_1(0) = 0, x_2(0) = 0.1, x_3(0) = 0.3, y_1(0) = 0.2, y_2(0) = 0.4$ and $y_3(0) = 0.6$ and respectively, the system has been simulated using mathematica. The obtained results show that the system under consideration achieved AS. In Figure 1, we have plotted the time series of the errors where as in Figure 2-4, the time series of the states variables of master & slave systems have been plotted with & without controller. Further, it also has been confirmed by the convergence of the AS quality defined by

$$e(t) = \sqrt{e_1^2(t) + e_2^2(t) + e_3^2(t)}$$

(2.1)

Figure (6) confirms the convergence of the errors of AS quality defined by (2.1).

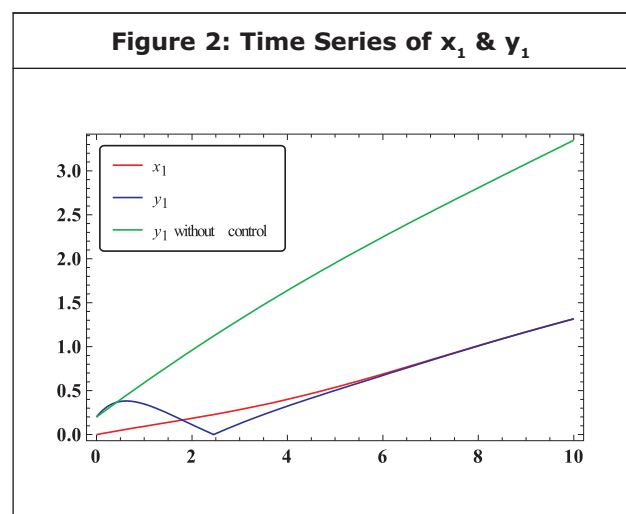
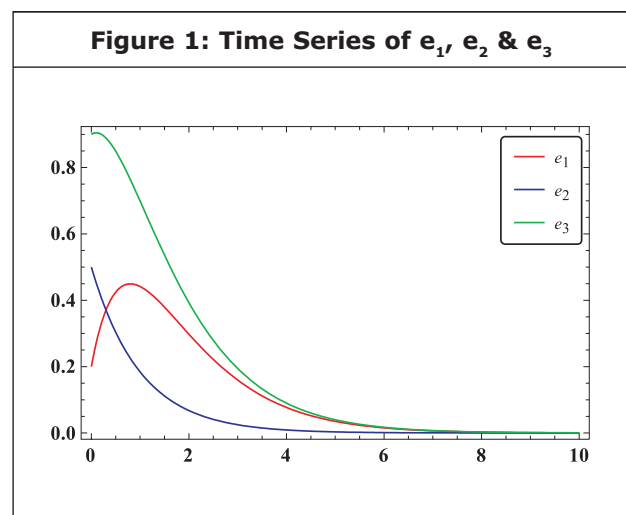


Figure 3: Time Series of x_2 & y_2

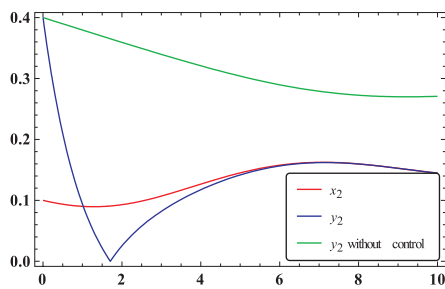


Figure 4: Time Series of x_3 & y_3

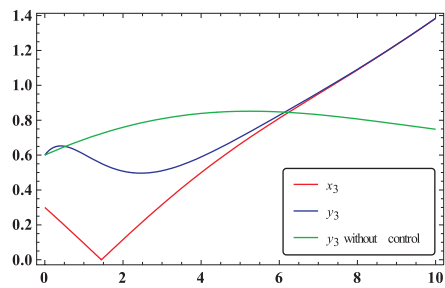


Figure 5: Time Series of $V(t)$


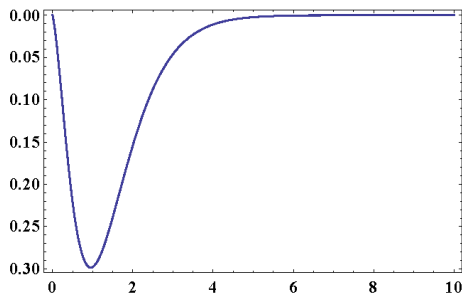


Figure 6: Convergence of Errors

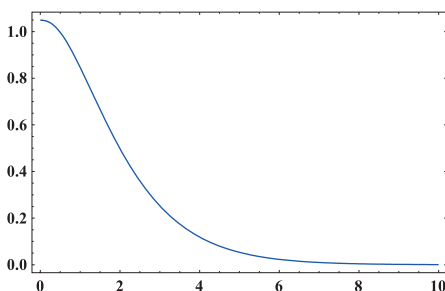

CONCLUSION

In this computational study, we have investigated AS behavior of the rotational dynamics of enceladus (natural satellite of Saturn) that is out of round satellite in a fixed elliptical orbit with spin axis perpendicular to the orbit plane with another identical dynamical system evolving from different initial conditions via the active control technique. The simulated results show that the system under consideration has achieved AS which is strongly guaranteed by all the plotted graphs.

REFERENCES

1. A A Emadzadeh and M Haeri (2005), "Anti-Synchronization of Two Different Chaotic Systems Via Active Control", *Trans. Eng. Comp. & Tech.*, Vol. 6, pp. 62-65.
2. A B Saaban, A B Ibrahim, M Shahzad and I Ahmad (2013), "Global Chaos Synchronization of Identical and Nonidentical Chaotic Systems Using only Two Nonlinear Controllers. World Academy of Science", *Engineering & Technology, International Journal of Mathematical Science & Engineering*, Vol. 7, No. 12, pp. 753-759.
3. A B Saaban, A B Ibrahim, M Shahzad and I Ahmad (2014), "Identical Synchronization of a New Chaotic System Via Nonlinear Control and Linear Active Control Techniques: A Comparative Analysis", *International Journal of Hybrid Information Technology*, Vol. 7, No. 1, pp. 211-224.
4. A Khan and M Shahzad (2012), "Computational Study of Synchronization & Anti-Synchronization in Mimas-Tethys System", *i-manager's Journal on Mathematics*, Vol. 1, No.2, pp. 26-33.
5. C Li and X Liao (2006), "Anti-synchronization of a Class of Coupled Chaotic Systems Via Linear Feedback Control", *Int. J. Bifurc. & Chaos*, Vol. 16, pp. 1041-1047.
6. C M Kim, S Rim, W H Kye, J W Ryu and Y J Park (2003), "Anti-synchronization of Chaotic oscillators", *Phys. Lett. A.*, Vol. 320, pp. 39-49.

7. G Cai and S Zheng (2008), "Anti-synchronization in Different Hyperchaotic Systems", *Journal of Information and Computing Science*, Vol. 3, pp. 181-188.
8. G Cai, and Z Tan (2007), "Chaos Synchronization of a New Chaotic System Via Nonlinear Control", *Journal of Uncertain Systems*, Vol. 1, pp. 235-240.
9. H Zhang and X K Ma (2004), "Synchronization of Uncertain Chaotic Aystems with Parameters Perturbation Via Active Control", *Chaos, Solitons & Fractals*, Vol. 21, pp. 39-47.
10. I Ahmad, A B Ibrahim, M Shahzad and A B Saaban (2014), "Global Chaos Synchronization of Two Different Chaotic Systems Using Nonlinear Control", *International Journal of Sciences: Basic & Applied Research*, Vol. 14, No.1, pp. 224-238.
11. I Ahmad, A B Saaban, A B Ibrahim and M Shahzad (2014), "Global Chaos Identical and Nonidentical Synchronization of a New 3-D Chaotic Systems Using Linear Active Control", *Asian Journal of Applied Sciences*, Vol. 2, No. 1, pp. 1-12.
12. I Ahmad, A B Saaban, A B Ibrahim and M Shahzad (2014), "Synchronization Study of a New Chaotic Aystem Via Nonlinear Control & Linear Active Control Techniques: A Comparative Atudy", *International Journal of Advanced Sciences & Technology*. (Accepted for publication in the forthcoming).
13. J B Liu, C F Ye, S J Zhang and W T Song (2000), "Anti-phase Synchronization in Coupled Map Lattices", *Phys. Lett. A.*, Vol. 274, pp. 27-29.
14. M C Ho, Y C Hung and C H Chou (2002), "Phase and Anti-phase Synchronization of Two Chaotic Systems by Using Active Control", *Phys. Lett. A.*, Vol. 296, pp.43-48.
15. M Shahzad (2011), "Synchronization and Anti-synchronization of a Planar Oscillation of Satellite in an Elliptic Orbit via Active Control", *Journal of Control Science and Engineering*.
16. M Shahzad (2011), "Synchronization Behaviour of the Rotational Dynamics of Enceladus Via Active Control", *Higher Education of Nature Science*, Vol. 1, No. 1, pp. 1-6.
17. M Shahzad (2012), "Chaos Synchronization of an Ellipsoidal Satellite Via Active Control", *Progress in Applied Mathematics*, Vol. 3, No.2, pp. 16-23.
18. M Shahzad (2012), "Synchronization & Anti-synchronization of Charged Particle in the Field of Three Plane Waves", *International Journal of Mathematical Archive*, Vol. 3, No. 11, pp. 3935-3940.
19. M Shahzad and I Ahmed (2013), "Experimental Study of Synchronization & Anti-synchronization for Spin Orbit Problem of Enceladus", *International Journal of Control Science and Engineering*, Vol. 3, No. 2, pp. 41-47.
20. M Shahzad and M Haris (2014), "Synchronization and Anti-synchronization of a New Hyperchaotic System Using Nonlinear Control", *Asian Journal of Engineering and Tech- nology*, Vol. 2, No. 1, pp. 24-34.
21. M Shahzad and M Raziuddin (2013), "Numerical Study of Synchronization & Anti-Synchronization of a Rotating Satellite", *International Journal of Mathematical Archive*, Vol. 4 No. 7, pp. 266-273.
22. M Shahzad and M Raziuddin (2013), "Synchronization & Anti-synchronization of a Satellite's Motion Under Air Drag Via Active Control", *International Journal of Mathematical Archive*, Vol. 4, No. 12, pp. 277-284.
23. M Shahzad and M Raziuddin (2013), "Syn-chronization & Anti-Synchronization of A Chaotic Satellite Under the Effect of Magnetic Torque Via Active Control", *i-manager's Journal on Mathematics*, (Accepted for publication in the forthcoming, Vol. 2, No. 4.
24. U E Vincent and A Ucar (2007), "Synchro-nization and Anti-synchronization of Chaos in Permanent Magnet Reluctance Machine", *Far East J. Dynamical Systems*, Vol. 9, pp. 211-221.

25. U E Vincent and J A Laoye (2007), "Synchronization, Anti-synchronization and Current Transport in Non-identical Chaotic Ratchets", *Physica A*, Vol. 384, pp. 230-240.
26. Y Zhang and J Sun (2004), "Chaotic Synchronization and Anti-synchronization Based on Suitable Separation", *Phys. Lett. A.*, Vol. 330, pp. 442-47.



International Journal of Engineering Research and Science & Technology

Hyderabad, INDIA. Ph: +91-09441351700, 09059645577

E-mail: editorijerst@gmail.com or editor@ijerst.com

Website: www.ijerst.com

